




微信公众号  
Scan with wechat!



我们的网站  
Our website



微信官网  
WeChat programs

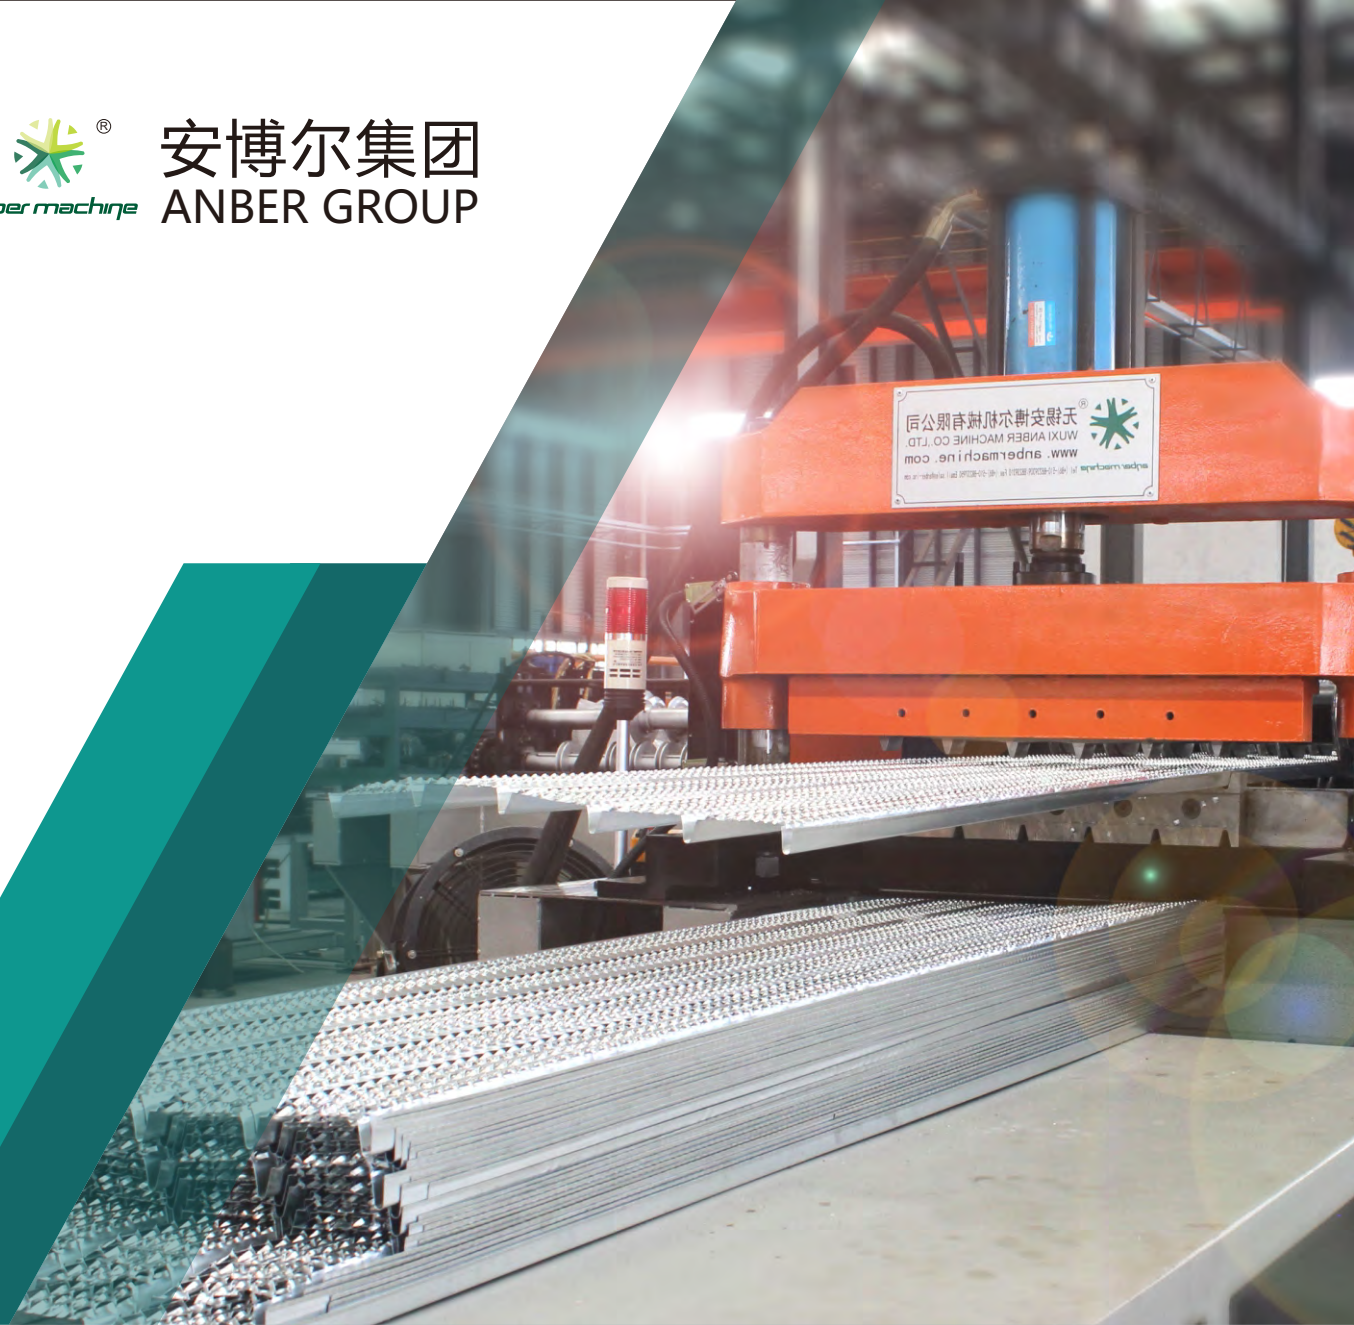

WUXI ANBER MACHINE CO., LTD. / 无锡安博尔机械有限公司

**BUILDING MESH MACHINE**

**墙体网机**



无锡安博尔机械有限公司

WUXI ANBER MACHINE CO., LTD.

Address: NO. 525, Jindong Road, Jinxi  
Town, Kunshan, China.  
Tel: (+86)-510-88239310/88239309  
Email: sales@anber-inc.com  
Web: www.china-anbermachine.com

地址：江苏省苏州市昆山锦溪镇锦东路525号  
电话：0510-88239310/88239309  
邮箱：sales@anber-inc.com  
网址：www.anbermachine.com

E-mail: sales@anber-inc.com  
www.anbermachine.com

# Company Profile

Wuxi Anber machine was started in Wuxi, and then we buy the land in Kunshan city, which is nearer to Shanghai Hongqiao airoirt. Our factory occupies about 20000 sqm, building area 14000 sqm, and the government has permitted another 670000 sqm for the new project that cooperate with the university and the government. We have more than 30 sets of processing machine. We have designed angle bead machine, rib lath machine, high speed expanded metal mesh machine, brickwork reinforcing mesh machine, metal lath machine, hi-rib lath machine, etc. The machines are all low in price and maintainance, high in quality and performance. Each kind of machine, we have high speed and lower speed machine for customer to choose.

We also have rich experience in producing the wire mesh and fence products, such as expanded metal mesh, angle bead, plaster stop, etc. Our compamy was named "AAA" factory by our National Industrial Authority.

We hope to have chance to establish good business relationship with all the friends who are interested in our products. We will expect your visit to our factory.

# 公司简介

安博尔机械位于风景秀丽的淀山湖畔——江苏省昆山市。公司占地面积20000平方米，建筑面14000平方米，并在锦溪工业区内又继续落实出让工业用地100亩，计划下一步开拓发展。公司拥有机械精加工设备30余台，配套齐全。钢板网及各种墙体建筑附件生产设备53台（套），开发了高速钢板网机，高速砖带网机，高速焊网机，高速冲床，高速护角网机，高速快易收口网机等国内顶尖技术的设备，提高了整体建筑设备和产品的生产能力。从立柱到墙板、楼板及龙骨类等近百种建筑材料。年生产各种建筑模网达3000万平方米，建筑龙骨附件可达6000万米，生产能力可实现年产值3亿元。

公司主要产品有：

护角网机：有高速和低速两种，适应客户不同的需求，经过多年的更新换代，现在我公司生产的护角网机通过换冲模和成型模也可以用于生产停止抹灰网、伸缩缝和门楣网等。

砖带网机：有冲网型和滚切拉伸两种方式，前一种更经济实惠，后一种产能更高并可以生产批汤网和砖带网两种产品。

停止抹灰网机：可生产不同抹灰厚度的停止抹灰网批汤网机: 滚切拉伸型，常见宽度有700mm，686mm，600mm模板网机: 有高速和低速两种极板网生产设备等这类设备及产品现在国际市场上得到了广泛的应用，不仅能提高产品的利用率，节省人工，并且使用寿命长。

公司在2015年通过了ISO9001:2008国际质量管理体系认证，并设有昆山市级企业技术中心，近六年来一直与上海同济大学、扬州大学等高校及科研所建立协作关系，走产、学、研联合开发之路。经公司技术团队联合攻关，自主创新研发了国家技术专利100多项，申报发明专利60多项，并应用专利技术开发了全自动墙板成套生产线，全自动楼板成套生产线。其中，全自动墙板成套生产线在2014年被认定为“国家级高新技术产品”；全自动楼板被认定为“省级高新技术产品”及“建设工程推荐产品”，标准号GB50010-2012，该产品产业化项目被国家科技部认定为“科技型中心企业科技创新基金”立项支持项目。同年公司被认定为“江苏省科技型中小企业”“苏州市高新技术企业”。





营业执照 / Business certificate



CE证书 / CE certificate



护角网机专利  
Patent of angle bead machine



批荡砖带一体机专利  
Patent of metal lath and brickwork mesh machine



砖带网机专利  
Patent of brickwork mesh machine


# CATALOGUE / 目录

|                                                     |    |
|-----------------------------------------------------|----|
| 高速模板网生产线 / High speed rib lath production line      | 01 |
| 低速模板网生产线 / Lower speed rib lath production line     | 03 |
| 快易收口网生产线 / Hi-rib lath production line              | 05 |
| 高速护角网生产线 / High speed angle bead production line    | 07 |
| 低速护角网生产线 / Lower speed angle bead production line   | 09 |
| 批荡砖带一体机 / Metal lath and brickwork mesh machine     | 11 |
| 砖带网生产线 / Brickwork reinforcing mesh production line | 13 |
| 停止抹灰网生产线 / Plaster stop bead production line        | 15 |
| 门楣网生产线 / Architrave bead production line            | 17 |
| 伸缩缝生产线 / Control joint bead production line         | 19 |
| 钢板网分条生产线 / Expanded mesh slitting production line   | 21 |
| 桥架生产线 / Lintel roll forming machine                 | 24 |



# 高速模板网生产线

## High Speed Rib Lath Production Line

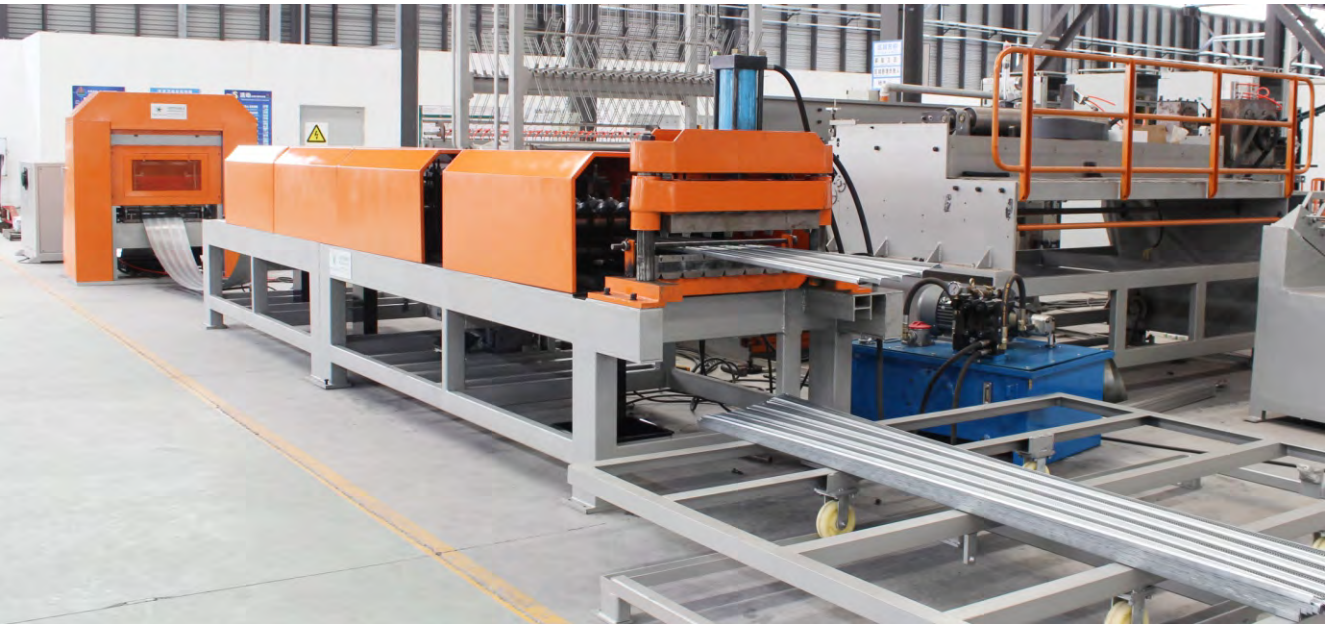

### Production flow

Firstly the metal rib production line use the decoiler put out galvanized steel coil initiative, the coil cross the expanded main machine feeding part into the expanding link, expanded machine put the power transmit to crankshaft cross motor belt drive, then drive the mold to do up down high speed punching movement, put the light sheet steel punch a roll forming, then the next expanded machine expand to the mesh size which requirement, and the hydraulic cutter cut which required length, and lath collector put the mesh lay on the trolley automatically. Except when start working need use man to send the board into the expanded machine, flatten machine, once in the normal work status, all the work will finish automatically. The metal rib production suit metal rib mesh automated continuous product, the main feature is full-auto, high accuracy, safe and reliable operation, improve production efficient.

### 生产流程

本生产线首先利用开料间歇机构控制开料机将镀锌板卷料主动放出，板料通过开料间歇机构后，进入送料机构，有送料机构将原材料送入冲网机，进入冲网环节，冲网机通过电机皮带传动将动力传递给曲轴，进而带动模具作上下高速冲剪运动，将镀锌板冲剪出需要的切口，曲轴一部分信号发送给伺服电机，伺服电机推动送料机构向前送料。除了开始工作时需手动把板料送入送料机、冲网机、成型机外，一旦正常工作，所有动作均自动完成。本生产线适用于模板网的自动化连续生产，其主要特点是自动化程度高、运行精度高，运行安全可靠，大大提高了生产效率。



### 开料架

内径:Φ420mm~520mm  
外径:Φ1000mm 最大  
承重:3000Kg  
电机:功率:1.5KW, 转速:  
1400r/min  
工作电压:三相, 380V/60Hz;  
外形尺寸:1600×1250×1500mm  
重量:800Kg

### Decoiler

Inner diameter:Φ420mm~520mm  
Outer diameter:Φ1000mm Max  
Loading weight:3000Kg  
Motor:Power: 1.5KW, Rotate speed:  
1400r/min  
Working voltage:3 phase, 380V, 60Hz  
Overall size:1250×1150×1650mm  
Weight:800kg



### 冲网机

冲网速度:480次/分钟  
模具驱动:B型V带驱动  
冲床冲力:20T  
最高速度:3.5m/min  
送料距离:7.5mm  
送料电机:功率2.0KW, 转速:  
2000r/min  
主电机:功率15KW, 转速:1440r/min  
模具:有效行程:1mm, 材质:  
Cr12MoV, 硬度:HRC58-62  
设备尺寸:1800×1300×1900mm  
重量:2800Kg

### Expanded main machine

Expanding speed:480 strokes/min  
Mold driven:B type V belt  
Punching force:20T  
Highest speed:3.5m/min  
Feeding distance:7.5mm  
Feeding motor:Power:2.0KW, rotate speed:  
2000r/min  
Main motor:Power:15KW, rotate speed:  
1440r/min  
Mold :Effective trolley: 1mm, material:  
Cr12MoV, hardness: HRC58-62  
Overall size:1800×1300×1900mm  
Weight:2800Kg



### 成型整平剪切一体机

整平辊直径:Φ141mm  
驱动形式:链传动  
压紧形式:螺柱压紧  
剪切动力:液压, 功率7.5KW, 转速:  
1440r/min  
电机:功率5.5KW, 转速:1440r/min  
送料滚:2根整平(上1下1),  
成型轮:14根整平(上7下7)  
整平轮:5根整平(上3下2)  
外形尺寸:6210×1310×1460mm  
重量:1000kg

### Mesh roll former and cutter

Straightening roller dia.:Φ141mm  
Driven type: Chain type gear  
Press type: Bolt press  
Cutter power: Hydraulic, power: 7.7kw, rotate  
speed: 1440r/min  
Motor: Power: 5.5KW, rotate speed: 1730r/min  
Feeding roller:2 roller straightening (one up  
one down)  
Forming roller:14 pcs straightening (seven up  
seven down)  
Straightening roller:5 rollers straightening (3up  
2 down)  
Overall size:6210×1310×1460mm  
Weight:1000kg



### 收料架

驱动动力:气压传动  
最大收料长度:2600mm  
最大收料宽度:900mm  
承重:1000Kg  
设备尺寸:3600×3600×1600mm  
重量:700Kg

### Collecting table

Driven type: Pneumatic  
Maxi lath length: 2600mm  
Maxi lath width: 900mm  
Loading weight: 1000kg  
Overall size:  
3600×3600×1600mm  
Weight: 700kg

低速模板网生产线

Lower Speed Rib Lath Production Line



生产流程 \ LAYOUT

开卷送料 - 冲网 - 成型 - 液压切断 - 收料 - 控制

Feeding trolley - uncoiler - expanded main machine - roll profiling machine - hydraulic rib lath shearing machine - hydraulic automatic rib lath collect - control cabinet.



技术参数 \ TECHNICAL PARAMETER

型号：ABE-MB300

开卷内径：480-540mm

开卷外径：1000mm

承重：1T

材料：0.3-0.6mm的镀锌板

送料宽度：50-450mm可调

总装机功率：19.5kw

减速机：BWED53

液压站容积：0.36方

液压油：40#

速度：280次/分

驱动：皮带

冲模材质：Cr12MOV,硬度：HRC50

模具行程：16.5-23mm

成型道次：18道

ID of the material: 480mm-520mm

OD of the material: Max. 1000mm

Loading weight: Max. 1000Kg

MATERIAL: 0.3-0.6mm thickness galvanized sheet

Feeding width: 50-450mm

Total Motor power: 19.5KW

Reducer: BWED53

Capacity of hydraulic station: 0.36cbm

Hydraulic oil: 40#

Expanding speed: 280strokes/min

Mold driven: Belt

Mold material: Cr12MOV



Hardness: HRC50

Mold Travel: 16.5-23mm

Forming roller QTY: 18 groups

模板网

Rib Lath

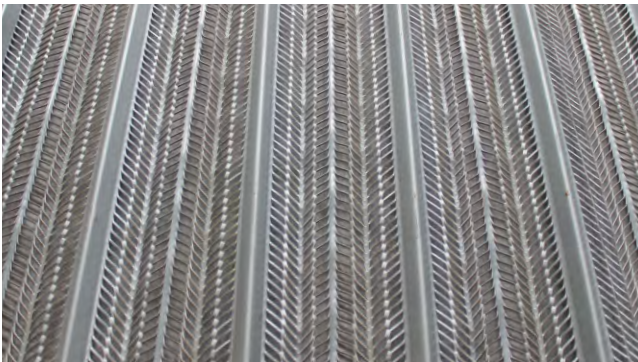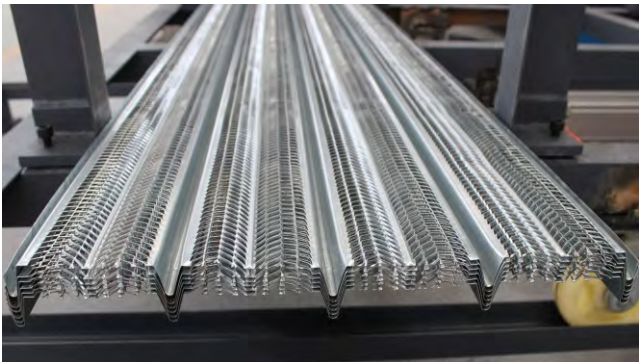

Rib- lath is expanded metal-lath stiffened with longitudinal ribs. The furring design of the mesh provides efficient background plaster for construction of partition, suspended ceilings and refurbishment works. Rib lath is ideal for refurbishing damaged or aged masonry walls, when a key for rendering is not certain due to disintegration or softening of the wall face.

免拆模板网又名“有筋扩张网”经特殊冲切加工而成，材质有镀锌带钢或304不锈钢，因特有的鱼刺型丝梗及规则排列的网孔，且网中压有V型加强筋沟，使得模网具有很好的刚性骨力与强度。

该产品可随意弯曲造型，可作免拆模板使用，具特强的抓浆功能，在钢结构中能起到环箍连接成整体抗震效应众多的优点，受到建筑界的赞许。

7-rib & 4-aperture \ 7勾4孔

| Model型号          | Rib Height<br>筋高(mm) | Rib Distance<br>筋距(mm) | Width<br>宽度(mm) | Aperture Size<br>网孔尺寸(mm) | Aperture Number<br>网孔数量 |
|------------------|----------------------|------------------------|-----------------|---------------------------|-------------------------|
| AB-1/8-4-100-600 | 1/8                  | 100                    | 600             | 9x20                      | 4                       |
| AB-3/8-4-100-600 | 3/8                  |                        |                 |                           |                         |
| AB-3/4-4-100-600 | 3/4                  |                        |                 |                           |                         |
| AB-7/8-4-100-600 | 7/8                  |                        |                 |                           |                         |

5-rib & 8-aperture \ 5勾8孔

| Model型号          | Rib Height<br>筋高(mm) | Rib Distance<br>筋距(mm) | Width<br>宽度(mm) | Aperture Size<br>网孔尺寸(mm) | Aperture Number<br>网孔数量 |
|------------------|----------------------|------------------------|-----------------|---------------------------|-------------------------|
| AB-1/8-8-150-600 | 1/8                  | 150                    | 600             | 11x17                     | 8                       |
| AB-3/8-8-150-600 | 3/8                  |                        |                 |                           |                         |

High-rib rib lath \ 高筋有筋扩张网

| Model<br>型号       | Weight<br>重量 |       | Sheet size<br>网片尺寸<br>(Inch) | Aperture Size<br>网孔尺寸(mm) | Packing<br>包装     |                       |
|-------------------|--------------|-------|------------------------------|---------------------------|-------------------|-----------------------|
|                   | Lbs/ yd²     | kg/m² |                              |                           | Pcs/bundle<br>片/捆 | Bundle/pallet<br>捆/托盘 |
| AB-3/8-7-96-584   | 3.4          | 1.83  | 27x97                        | 11.2 x 5.5                | 20                | 25                    |
| AB-7/8-8-100-700  | 6.7          | 3.6   |                              | 9.5 x 7.2                 |                   |                       |
| AB-7/8-8-100-700a | 6.1          | 3.3   |                              |                           |                   |                       |

# 快易收口网生产线

## Hi-Rib Lath Production Line



### 描述\DESCRIBE

The Hi-rib lath machine is used to produce the hi-rib lath which is applied to plaster and reinforcing the wall, the hi-rib lath production line Working process is De-coil → punching → expanding and shearing → Rib lath feed out.  
快易收口网机生产出的快易收口网主要用于加固墙体，生产流程：开料，冲网，拉伸成型和收料。


### 技术参数\TECHNICAL PARAMETER

|                         |                           |
|-------------------------|---------------------------|
| Model 型号                | ABE-KYS500                |
| Punching motor 电机功率     | 5.5kw                     |
| Punching force 冲床冲力     | 16T                       |
| Material thickness 材料厚度 | 0.3-0.7mm                 |
| Forming motor 成型电机      | 5.5kw                     |
| Working speed 冲次        | 500 strokes/min<br>500次/分 |

|                                       |                                                                          |
|---------------------------------------|--------------------------------------------------------------------------|
| Punching mold 冲模                      | Cr12Mov, size according to customer's requirement<br>Cr12Mov, 尺寸根据客户要求设计 |
| Forming mold 成型模                      | Material 45# steel, 7+2 groups<br>材质45号钢, 7+2组成型辊                        |
| Forming part 成型机                      | 6 groups roller, with Turkish head<br>6组成型, 带土耳其头                        |
| Hydraulic pressure for cutting 液压切断压力 | 7Mpa, 40L tank                                                           |
| Machine weight 设备重量                   | About 4.5T                                                               |


# 快易收口网

## Hi-Rib Lath

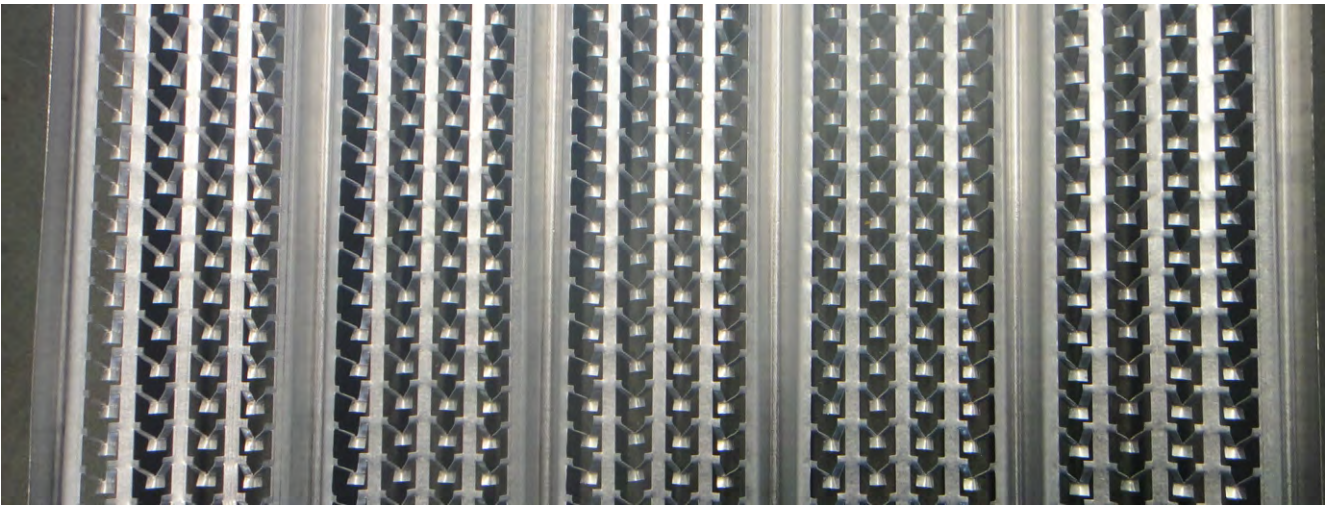


### PARAMETER OF FINISHED HI-RIB LATH

| Model 型号 | Weight 重量 (kg/m²) | Material thickness 材料厚度 (mm) | Rib height 肋高 (mm) | Rib distance 肋距 (mm) | Width 宽度 (mm) | Length 长度 (mm) |
|----------|-------------------|------------------------------|--------------------|----------------------|---------------|----------------|
| HB30     | 2.6               | 0.30                         | 21                 | 89                   | 450           | 2200           |
| HB35     | 3                 | 0.35                         |                    | 89                   |               |                |
| HB45     | 3.6               | 0.45                         |                    | 89                   |               |                |
| HB50     | 3.8               | 0.50                         |                    | 89                   |               |                |
| HB55     | 4.2               | 0.55                         |                    | 89                   |               |                |

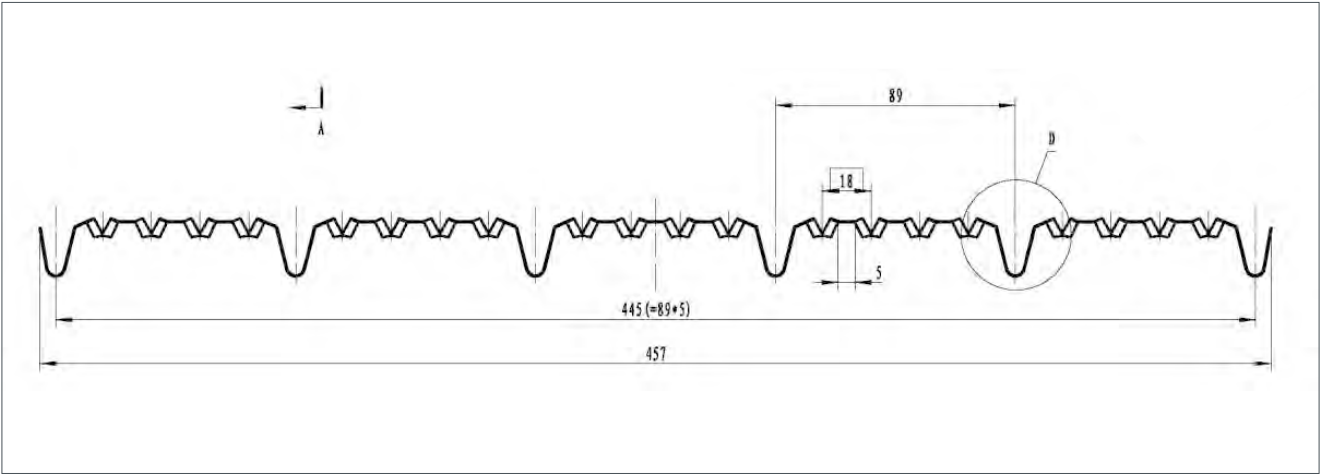


# 高速护角网生产线

## High Speed Angle Bead Production Line

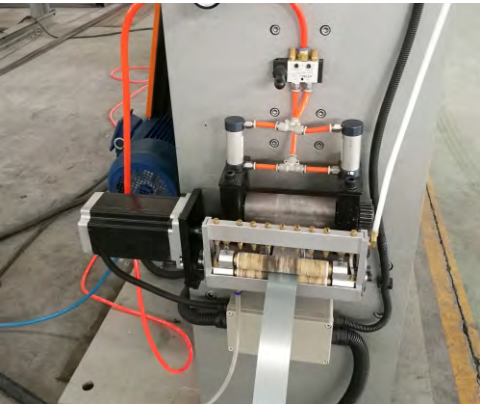

Angle bead production line is used to produce the angle bead which is mainly used to protect the angle of the wall. The expanded metal bead machine can produce angle bead, corner bead, corner mesh, mini mesh, etc. The expanded metal bead production line includes: 1 set of decoiler----1 set of expanded main machine-----1set of profiling machine-----1 set of collecting table-----1 set of PLC controlling cabinet

高速护角网机是用于生产护角，护角现已广泛用于墙角加固。  
整条生产线包含，一台开料架，一台冲床，一台成型切断机，一台收料架和一个控制柜。

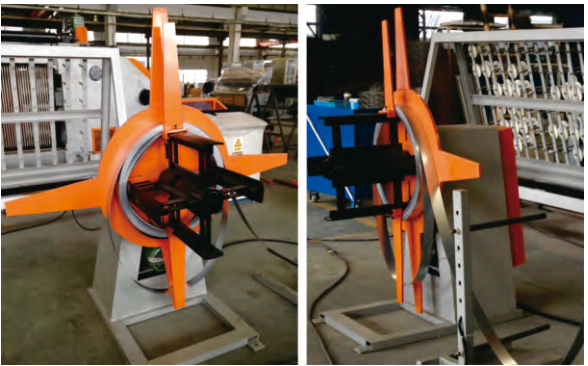

**De-coiler**  
Maximum inner diameter: 480-508mm, can be adjustable  
Loading weight: 1000Kgs  
Motor reducer: 0.6kw  
Machine weight: 500kg  
Overall size: 400×1200×1200mm  
synchronized with expanding tool.  
There is tension device between the de-coiler and expanding tool.

**开料架**  
开卷内径：480-508mm，可调  
承重：1000Kgs  
减速电机：0.6kw  
设备重量：约500kg  
外形尺寸：400×1200×1200mm  
在开料架和冲床之间有个感应架以保证开料架跟跟冲床同步。




**Main Machine**  
Model:ABE-HJ500  
Machine size (L\* W\* H):1250X1250x 2300mm  
Machine weight:3000kg  
Motor Power :4kw  
Mesh size:26\*13mm, or according to the draw  
Punching press:30Tons  
Flange size:50/55/65/70mm, according to the sample  
Strand width:1.2mm  
Material thickness:0.3-0.7mm  
Max. speed:500 times/minute for GI, 450 strokes/min for stainless steel  
Mold material:DC53  
Feeding method:Stepping motor feeding. Made from Delta.  
Pneumatic clutch :One year guarantee

**护角网机**  
型号：ABE-HJ500  
外形尺寸:1250X1250x 2300mm  
设备重量:3000kg  
电机:4kw  
网孔:26\*13mm, 或者根据客户图纸  
冲床冲力:30吨  
两翼尺寸:50/55/65/70mm, 或根据样品  
梗宽:1.2mm  
材料厚度:0.3-0.7mm  
生产速度:镀锌板500次/分，不锈钢450次/分  
模具材质:DC53

**Roller profiling machine with hydraulic shearer**  
Motor: Power: 1.5kW, voltage: 380V, rotating speed:1440r/min  
Forming roller diameter:160mm, 45# steel, HRC50, Shaft material: 45# steel, HRC50  
Drive type: Chain drive. Chain drive is enough, only when the material thickness is bigger than 1.5mm needs the gear type.  
Compress type: Manual operation, to avoid the material run away.  
Cutting power: Hydraulic type, hydraulic motor power: 2.2kw, dia. 63mm hydraulic station, 400\*500\*200mm hydraulic box. Hydraulic valve and control valve brand: Vickers  
Synchronized with encoder  
Cutting mold material: SKD-11  
Size:1840×600×1200mm  
Forming roller wheel QTY:5 forming straightening rolling. No Reducer gearbox.  
Weight:500kg

**成型剪切机**  
电机: 功率：1.5kW，电压：380V,转：1440r/min  
成型辊直径:160mm, 45# steel, HRC50  
驱动形式:链传动  
压紧形式: 手动  
液压切断:液压调试格编码器同步  
切刀材质:SKD-11  
外形尺寸:1840×600×1200mm  
成型辊轮数:5个成型整平辊轮  
重量Weight:500kg

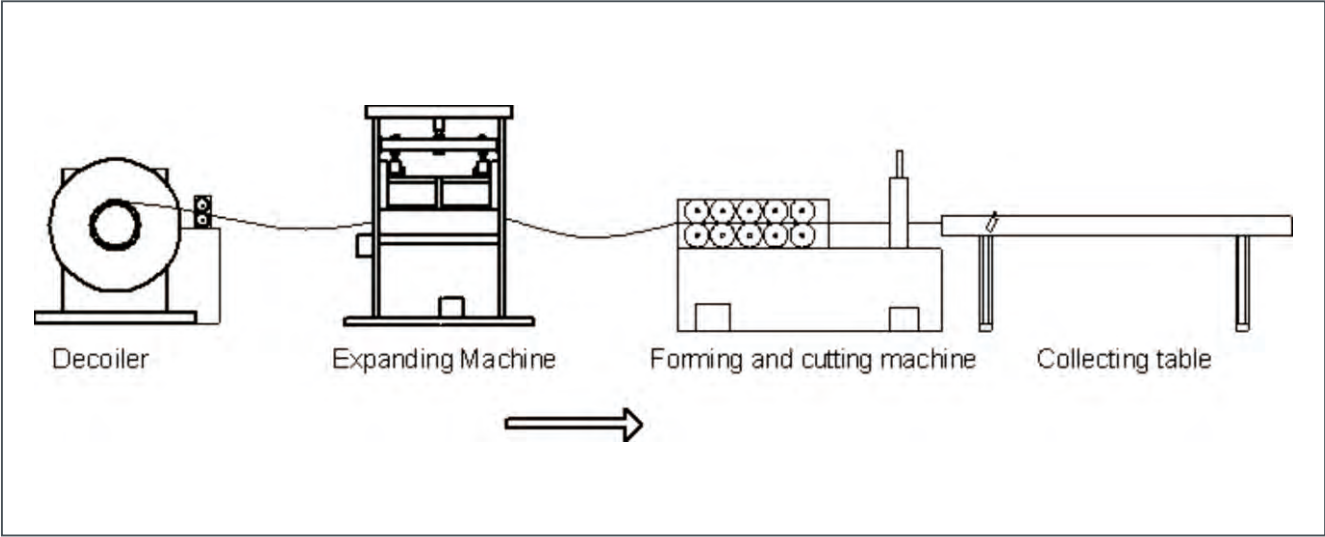

低速护角网生产线

Lower Speed Angle Bead Production Line




整条护角生产线包含5个部分：开料架，冲床，控制柜，成型，收料台  
Seen on the picture, the “V” type angle bead production line consists of five parts: uncoiler, angle bead machine, electric control cabinet, roller profiling machine and collecting table.



主要技术参数 / MAIN PARAMETER

型号：ABE-HJ300  
设备重量：3.9T  
总装机功率：13.5KW  
冲床：280次/分  
转速：1440 strokes/min  
材料厚度：0.3-1mm  
成型道次:5组  
切模:1套




Model:ABE-HJ300  
Machine Weight: 3.9T  
Total Power: 13.5KW  
Punding Speed:280 strokes/min  
Rotational Speed: 1440 strokes/min  
Material Thickness: 0.3-1mm  
Profiling Mould: 5groups  
Cutting Mould: 1sets

护角网

Angle bead

带边护角网 / Coner bead with reinforce flange

加边护角网主要分为R01、 R02护角以及P32护角，以0.3-0.7mm镀锌钢板或不锈钢板（铝板）为原材料扩张拉伸两翼而成，带加强边的护角比普通的护角更加牢固可靠。  
**R01, 4.5mm radius-55mm legs.**  
The expanded 55mm wings make the cement to form s strong bond between the base wall, and bead allowing for up to 10mm of cement render to be applied. The wing is expanded up to the rib of the bead, which has a 4.5mm radius, providing a smooth strong knock-resistant corner.

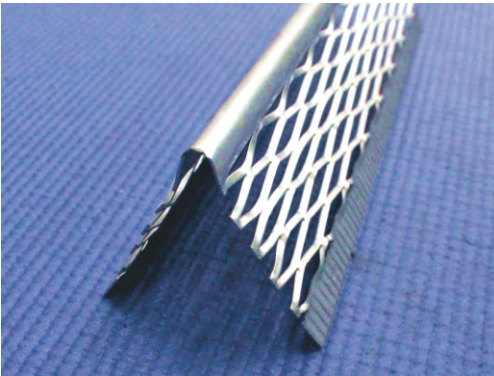

**R02, 2.5mm radius-60mm legs.**  
A large section than the R01 which allows for up to 25mm of cement render to be applied due to its longer wing length of 60mm. It's especially suited for use on pre-stressed concrete, and where pre-formed corners require realignment. A smaller 2.5mm radius at the nib provides a sharp strong knock resistant corner.

| Model<br>型号        | Width of wing<br>两翼宽度 | Length<br>长度 (mm)      | Material Thickness<br>原材料厚度 | Materials<br>材质           | QTY/BO<br>X<br>片/盒 |
|--------------------|-----------------------|------------------------|-----------------------------|---------------------------|--------------------|
| AB-R01/R=4.5/55*55 | 55x55                 | 2400/<br>2700/<br>3000 | 0.3-0.7                     | GI/SS/Alu.<br>不锈钢/镀锌钢板/铝板 | 50                 |
| AB-R02/R=2.5/60*60 | 60x60                 |                        |                             |                           |                    |
| AB/R=2/32*32       | 32x32                 |                        |                             |                           |                    |

冲孔护角网 / Drywall mesh & thin coat mini mesh




冲孔护角网以镀锌钢或不锈钢冲孔压制成形，两翼可以使护角网和灰泥牢固结合，用于在建筑物中行程光滑、平直、简洁的角部，用时保护角部防止碎裂、撞击损坏。  
For single Coat Plaster Thin Coat Angle Bead is rigid but light weight, the dry wall bead is designed for dry wall, block and slab work. Provides excellent adhesion and reinforcement, with the revised 85°angle, allows greater scope for on-site adjustments and setting.

| Model<br>型号 | Width of wing<br>两翼宽度 (mm) | Lenght<br>长度 (mm)  | Material Thickness<br>原材料厚度 (mm) | Material<br>材质      | QTY/BOX<br>片/盒 |
|-------------|----------------------------|--------------------|----------------------------------|---------------------|----------------|
| AB-ABP25    | 25x25                      | 2400/2700<br>/3000 | 0.3-0.7                          | GI/ALU.<br>镀锌钢板或者铝板 | 50             |
| AB-ABP30    | 30x30                      |                    |                                  |                     |                |

备注：所有尺寸均可根据客户要求定制。  
Notice: All dimensions can be customized according to your requirements.

压点冲孔护角 / Drywall angle beads

护角网的两翼可以使角网与灰泥牢固结合，我司生产的冲孔型护角网可以在护角表面增加滚花工艺,用于在建筑物中形成光滑、平直、简洁的角部，同时保护角部防止碎裂、撞击、损坏。  
Single Coat Plaster (Thin Coat) Angle Bead is rigid but light weight, the drywall bead is designed for drywall, block and slab work. Provides excellent adhesion and reinforcement, with the revised 85°angle, allows greater scope for on-site adjustments and setting. The corner bead is rolled and the knurling perforation originates by imprint of the roller. The advantage of the knurling perforation is a better adhesion of sealants and mechanical breaking of strain in material.

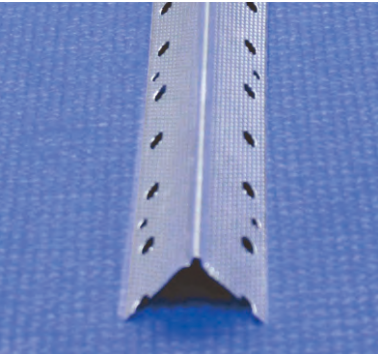

|              | BEAD   | TOTAL   | TOTAL      | TOTAL      | APPROX. | TOTAL |
|--------------|--------|---------|------------|------------|---------|-------|
| CORNER BEAD  | LENGTH | BEADS   | BOXS       | BEADS      | P/LB    | P/FT  |
| PART NUMBER  | P/FT   | PER BOX | PER PALLET | PER PALLET | PALLET  | BOX   |
| AB-HDG-CB-6  | 6'     | 84      | 48         | 4032       | 2419    | 504   |
| AB-HDG-CB-8  | 8'     | 63      | 48         | 3024       | 2419    | 504   |
| AB-HDG-CB-9  | 9'     | 56      | 48         | 2688       | 2419    | 504   |
| AB-HDG-CB-10 | 10'    | 50      | 48         | 2400       | 2419    | 504   |

批荡砖带一体机


Metal lath and brickwork mesh machine



Self furring lath production line is used to produce the self furring lath which is applied to plaster and reinforcing the wall, the production line contains de-coiler, expanded main machine, roller profiling machine with hydraulic shearer and collecting table.



**MAIN INFORMATION**  
Rolling Speed: 12mpm  
NO. of operators: Two  
Approx. weight (Total weight): 4 tons  
Total power requirement: 12kw  
Compressed air requirement (cft/min.): 0.5M3  
Machine Guard: yes  
Machine Mechanism: Rotary

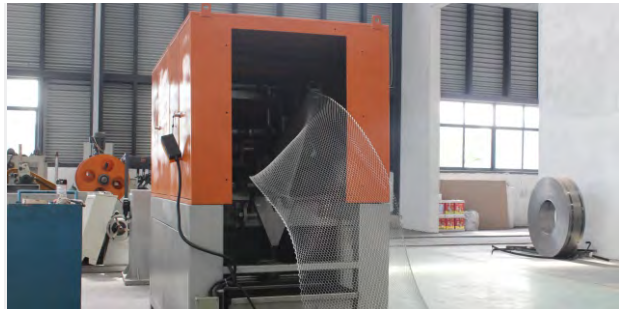

**ROLL SHEARING/  
EXPANDING MACHINE**  
Outer diameter of cutter: Φ263mm  
Blade repaired capacity: 3 mm  
Speed or roll and cutting: 12m/min  
Motor: Power:4kw  
Voltage: 380V  
Rotation speed: 1450r/min  
Machine Size: 2220x1510x1810mm  
Weight: 2352Kg



**STRAIGHTENING  
AND SLITTING MACHINE**  
Diameter of roll: 63mm  
Straightening roller QTY: 13 straightening rollers  
Motor: Power:3kW,  
Reducer: JZQ200——i=20.54  
Size: 1800x1665x1725mm  
Weight: 1554Kg



**STRACKER**  
Product size: 700x3000mm  
Loading weight: 1t  
Loading height: 500mm  
Size of machine:  
3610\*2900\*1620mm  
Weight: 586Kg




**DONBLE HEAD  
RE-WINDER**  
Inner diameter: 120mm  
Outer diameter: 800mm  
Loading weight: 300Kg  
Motor: Power: 1.5kw, voltage:  
380V, 2 sets  
Machine size:  
3240x1770x1610mm  
Weight: 1420Kg


批荡网 / Metal lath




Diamond metal lath 批汤网

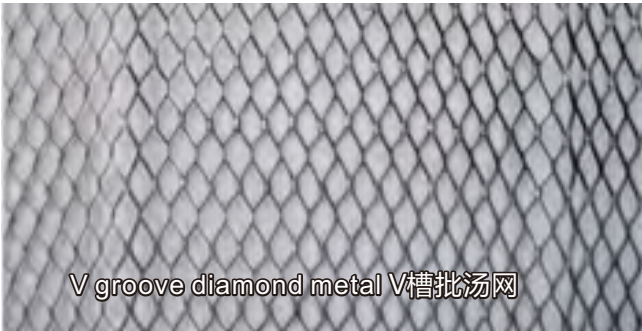

V groove diamond metal V槽批汤网

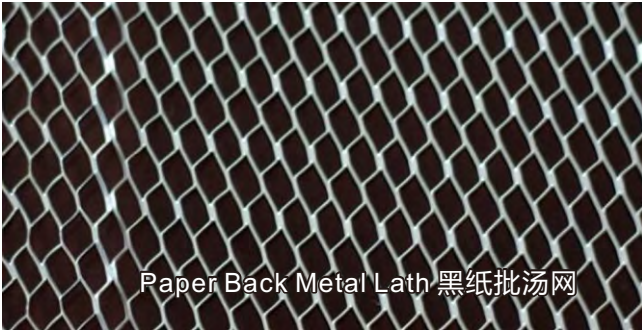

Paper Back Metal Lath 黑纸批汤网

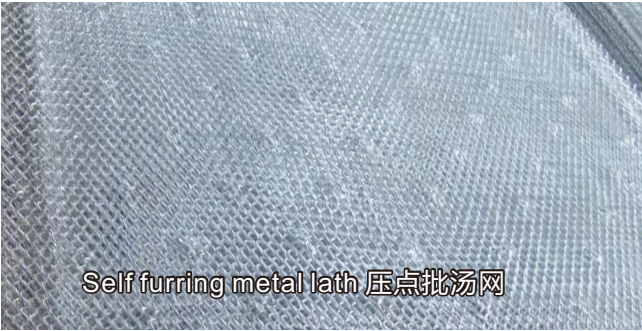

Self furring metal lath 压点批汤网

Diamond Mesh Lath is produced from thin galvanized steel strip, its LWD are lined regularly, and the mesh strand formed diamond shape with special structure, Self-furring embossed "V" groove holds the lath away from the surface to aid in the keying of stucco to the lath.

批荡网采用薄型镀锌带钢，此网板有别于传统菱形网，其网孔长节距纵向规则排列，网眼丝梗侧立六角形结构独特，网板两边带有加宽加强筋，中间压有V型沟筋，具有较好的刚性骨力，网板无接点且整体结实牢固。

| Model<br>型号 | Weight<br>重量<br>(lbs/yd <sup>2</sup> ) | Size<br>尺寸<br>(") | Pcs/<br>bundle<br>片/捆 | Pcs/<br>pallet<br>片/托 |
|-------------|----------------------------------------|-------------------|-----------------------|-----------------------|
| ABE-ML1.75  | 1.75                                   | 27x96             | 10                    | 500                   |
| ABE-ML2.5   | 2.5                                    |                   |                       |                       |
| ABE-ML3.4   | 3.5                                    |                   |                       |                       |

砖带网生产线

Brickwork Reinforcing Mesh Production Line



描述 \ DESCRIBE

Based on market demand, our company has designed and developed this professional production line of coil mesh independently. It features low noise, high yield, energy saving and environment protection. It can produce various type of coil mesh with width from 50mm to 200mm. With high efficiency, it can produce 2-4 line of mesh at a time. And also, its operation is easy.


This production line is mainly composed of three parts: feed unit, strip punching machine and receiving unit.

该砖带网机仅用于生产砖带网，生产砖带网宽度在50-200mm之间。进度高，可以同时出2条或4条网，操作简便。整条生产线包含三部分，开卷送料，冲网机和收卷机。



技术参数 \ TECHNICAL PARAMETER

| Model 型号            | ABE-ZD400                    | ABE-ZD600                            |
|---------------------|------------------------------|--------------------------------------|
| Punching motor 电机功率 | 4kw                          | 22kw                                 |
| Punching force 冲床冲力 | 16T                          | 25T                                  |
| Product size 产品规格   | 4*100mm, 2*150mm, or 2*200mm | 6*100mm, 4*150mm, 2*200mm or 2*300mm |
| Machine weight 设备重量 | About 4T                     | About 8T                             |

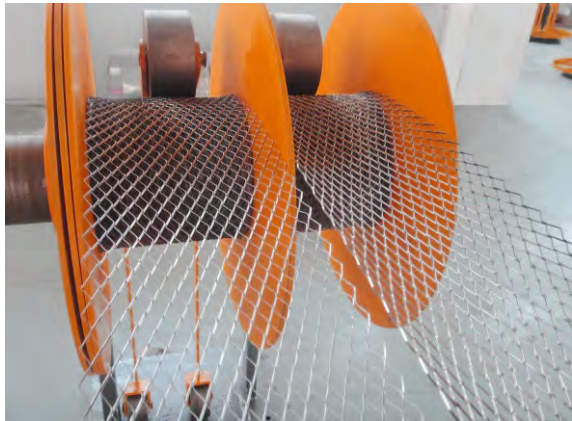

砖带网

Brickwork Reinforcing Mesh



Material: Galvanized steel, stainless steel  
Width: 75mm, 100mm, 175mm, 225mm, 300mm  
Length: 20m

Coil mesh is used primarily as anti-cracking reinforcement in the construction of brick and block masonry. Anber supplies a series constructional wire mesh including expanded metal coil mesh for brickwork reinforcement in all types of buildings such as reinforcement of road, tunnel reinforcement, ground paving, swimming pools, concrete reinforcement and floor reinforcement.

砖带网主要在建筑中砌墙时做为钢筋混凝土防裂用。阿博提供的砖带网，可广泛应用于路边，隧道加固，地面铺砌，游泳池，混凝土钢筋建筑和地板补砌。

PARAMETER OF BRICKMESH REINFORCING MESH

| Model 型号  | Coil width 卷宽 (mm/inch) | Length 卷长 (mm) | Thickness 厚度 (mm) |
|-----------|-------------------------|----------------|-------------------|
| ABE-BR2.5 | 63/2.5                  | 20-100         | 0.35-0.5          |
| ABE-BR3   | 75/3                    |                |                   |
| ABE-BR4   | 100/4                   |                |                   |
| ABE-BR4.5 | 112/4.5                 |                |                   |
| ABE-BR6   | 150/6                   |                |                   |
| ABE-BR7   | 175/7                   |                |                   |
| ABE-BR8   | 200/8                   |                |                   |
| ABE-BR9   | 228/9                   |                |                   |
| ABE-BR12  | 305/12                  |                |                   |

停止抹灰网生产线

Plaster Stop Bead Production Line




This machine features high yield, low noise, environment protection and easy operation. The required floor space of whole line is 36 square meters, and the whole line is usually 10 to 12 meters long. This production line is mainly composed of four parts: decoiler, expanded main machine, roller profiling machine, and receiving unit.

该设备仅用于生产停止抹灰网，通过换冲模和成型模可以用来生产该系列里的其他产品。整条生产线占地约10-12米长。整条生产线包含开卷送料，冲网机、成型机和收料台。


技术参数 \ TECHNICAL PARAMETER

|                                       |                                                                          |
|---------------------------------------|--------------------------------------------------------------------------|
| Model 型号                              | ABE-MH300                                                                |
| Punching motor 电机功率                   | 3kw                                                                      |
| Punching force 冲床冲力                   | 16T                                                                      |
| Material thickness 材料厚度               | 0.3-0.7mm                                                                |
| Punching mold 冲模                      | Cr12Mov, size according to customer's requirement<br>Cr12Mov, 尺寸根据客户要求设计 |
| Working speed 冲次                      | 300 strokes/min<br>300次/分                                                |
| Forming part 成型机                      | 5 groups roller, with Turkish head 5组成型, 带土耳其头                           |
| Hydraulic pressure for cutting 液压切断压力 | 5Mpa                                                                     |
| Cutting length 切断长度                   | 3m or according to customer's requirement 3m或根据客户要求                      |
| Machine weight 设备重量                   | About 4.3T                                                               |

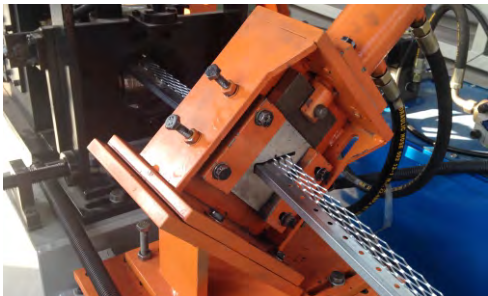


停止抹灰网

Plaster Stop Bead

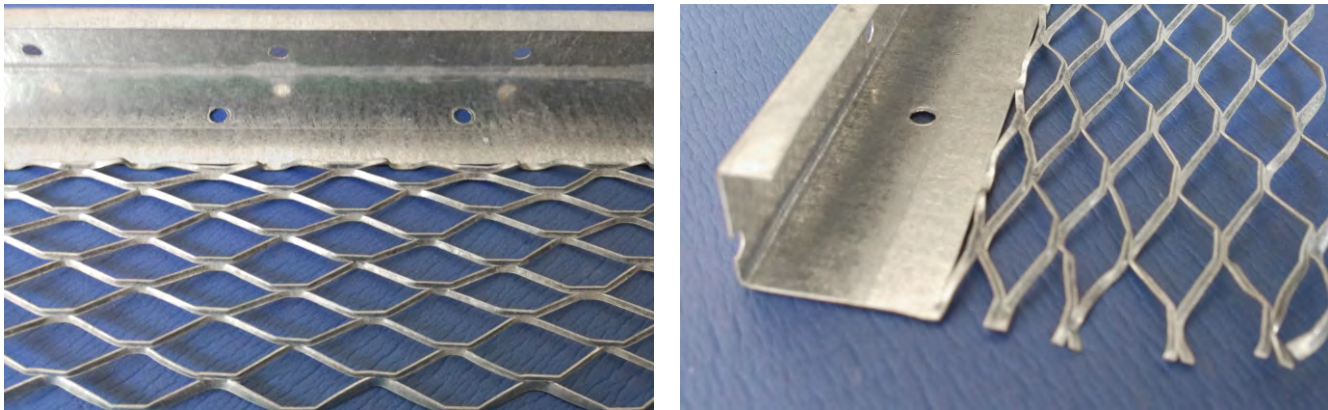

| Model 型号  | Width<br>宽度 (mm) | Length<br>长度 (mm) | Plaster depth<br>抹灰厚度 (mm) |
|-----------|------------------|-------------------|----------------------------|
| ABE-PSB10 | 28-65            | 2400-3000         | 10                         |
| ABE-PSB13 |                  |                   | 13                         |
| ABE-PSB16 |                  |                   | 16                         |
| ABE-PSB19 |                  |                   | 19                         |
| ABE-RSB16 | 45               |                   | 16                         |
| ABE-RSB17 |                  |                   | 17                         |
| ABE-RSB18 |                  |                   | 18                         |
| ABE-RSB19 |                  |                   | 19                         |
| ABE-RSB20 |                  |                   | 20                         |

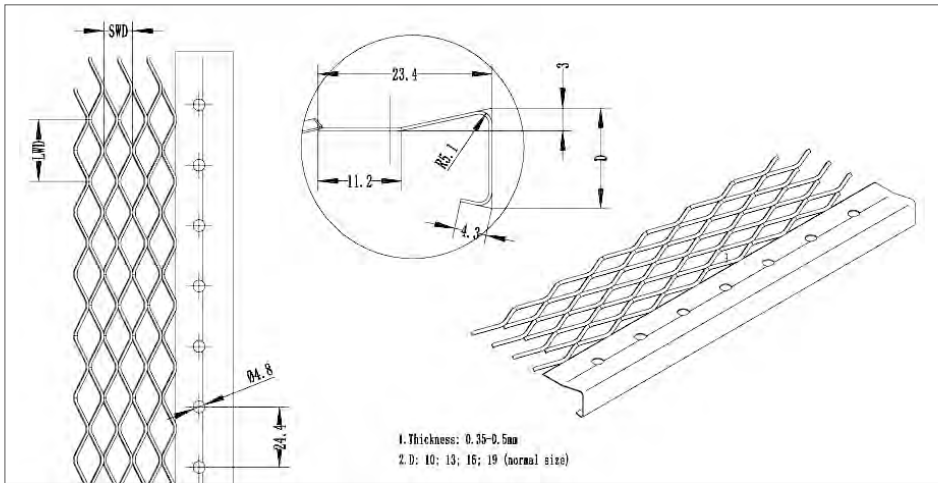

备注：  
1. AB-PSB 指的是Plaster Stop Beads, AB-RSB 指的是Render Stop Beads  
2. 所有尺寸均可根据客户要求定制。

Notice:  
1. AB-PSB refers to Plaster Stop Beads  
AB-AB refers to Render Stop Beads  
2. All dimensions can be customized according to your requirements.

门楣网生产线

Architrave Bead Production Line



技术参数 | TECHNICAL PARAMETER

|                                          |                                                                            |
|------------------------------------------|----------------------------------------------------------------------------|
| Model<br>型号                              | ABE-MM300                                                                  |
| Punching motor<br>电机功率                   | 3kw                                                                        |
| Punching force<br>冲床冲力                   | 16T                                                                        |
| Material thickness<br>材料厚度               | 0.3-0.7mm                                                                  |
| Punching mold<br>冲模                      | Cr12Mov, size according to customer's requirement<br>Cr12Mov<br>尺寸根据客户要求设计 |
| Working speed<br>冲次                      | 300 strokes/min<br>300次/分                                                  |
| Forming part<br>成型机                      | 6 groups roller, with Turkish head<br>6组成型，带土耳其头                           |
| Hydraulic pressure for cutting<br>液压切断压力 | 5Mpa                                                                       |
| Machine weight<br>设备重量                   | About 4.5T                                                                 |

门楣网

Architrave Bead

Galvanized (internal use) and stainless steel (external use) Architrave Beads used for decorative purposes to give a shadow between different walls finishes (i.e. Wall and ceiling or door and window reveals). It can also be used to act as a neat divide between differing wall finishes. Available with or without a return flange - (engaging or abutting).

镀锌(内部使用)和不锈钢(外用)门楣网用于墙体抹灰。门楣网用于装饰需抹灰的门窗边缘或其他木工板、天花板的边缘，有带折边和不带这

ARCHITRAVE BEAD




| Model<br>型号 | Width<br>宽度<br>(mm) | Length<br>长度<br>(mm) | Plaster depth<br>抹灰厚度(mm) | Material<br>材料                                    | QTY/BOX<br>片/包 |
|-------------|---------------------|----------------------|---------------------------|---------------------------------------------------|----------------|
| AB-ARC10    | 10                  | 3000                 | 10/13                     | Galvanized or<br>stainless steel<br>不锈钢板或镀锌<br>钢板 | 50             |
| AB-ARC15    | 15                  |                      |                           |                                                   | 40             |
| AB-ARC20    | 20                  |                      |                           |                                                   |                |
| AB-ARC23    | 23                  |                      |                           |                                                   |                |
| AB-ARC25    | 25                  |                      |                           |                                                   |                |
| AB-ARC27    | 27                  |                      |                           |                                                   |                |

ARCHITRAVE BEAD WITHOUT FLANGE




| Model<br>型号 | Width<br>宽度<br>(mm) | Length<br>长度<br>(mm) | Plaster depth<br>抹灰厚度(mm) | Material<br>材料                                    | QTY/BOX<br>片/包 |
|-------------|---------------------|----------------------|---------------------------|---------------------------------------------------|----------------|
| AB-AWO10    | 10                  | 3000                 | 10/13                     | Galvanized or<br>stainless steel<br>不锈钢板或镀锌<br>钢板 | 50             |
| AB-AWO15    | 15                  |                      |                           |                                                   | 40             |
| AB-AWO20    | 20                  |                      |                           |                                                   |                |
| AB-AWO23    | 23                  |                      |                           |                                                   |                |
| AB-AWO25    | 25                  |                      |                           |                                                   |                |
| AB-AWO27    | 27                  |                      |                           |                                                   |                |

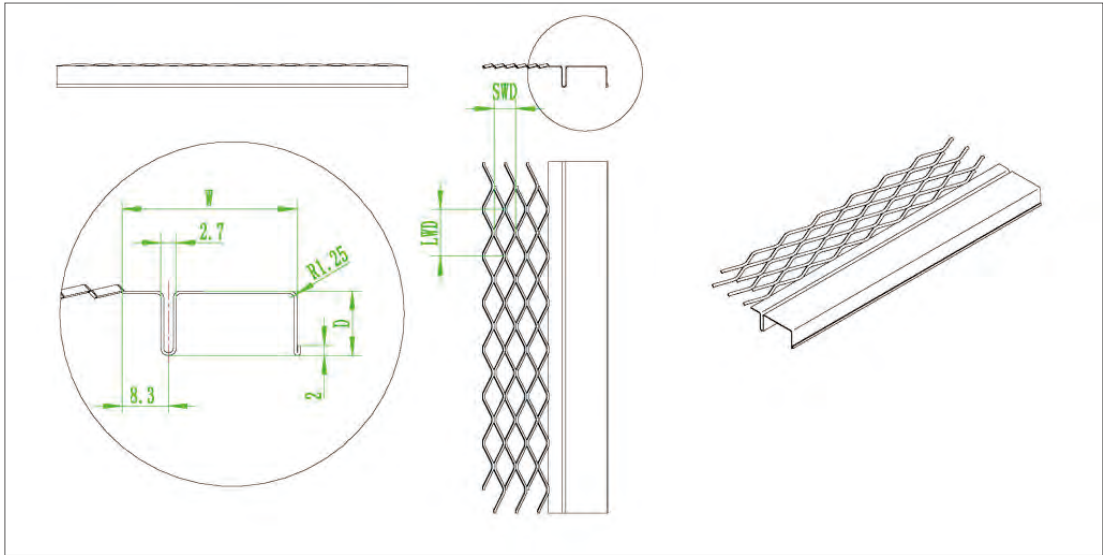

备注：所有尺寸均可根据客户要求定制。  
Notice: All dimensions can be customized according to your requirements.

伸缩缝生产线

Control Joint Bead Production Line

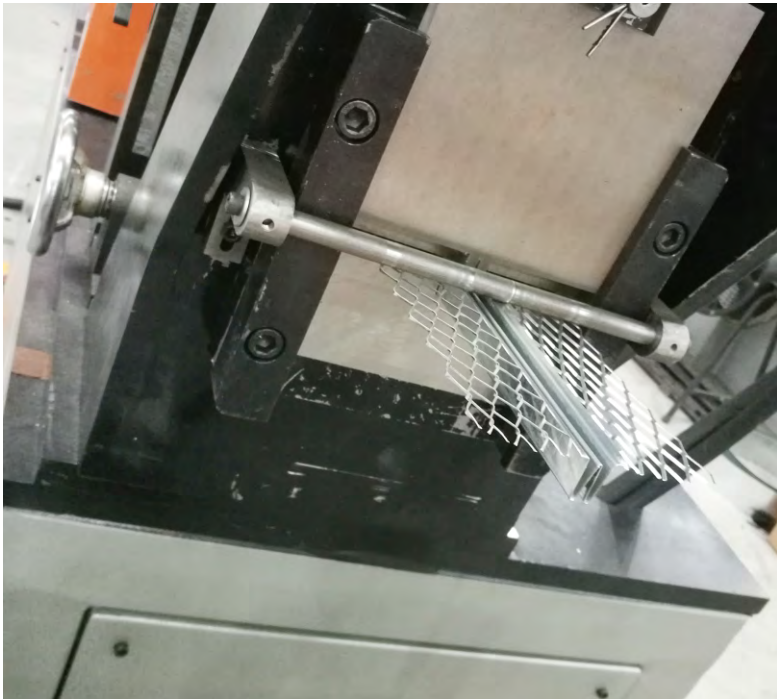


技术参数\TECHNICAL PARAMETER

|                                          |                                                                          |
|------------------------------------------|--------------------------------------------------------------------------|
| Model<br>型号                              | ABE-SSF300                                                               |
| Punching motor<br>电机功率                   | 3kw                                                                      |
| Punching force<br>冲床冲力                   | 16T                                                                      |
| Material thickness<br>材料厚度               | 0.3-0.7mm                                                                |
| Punching mold<br>冲模                      | Cr12Mov, size according to customer's requirement<br>Cr12Mov, 尺寸根据客户要求设计 |
| Working speed<br>冲次                      | 300 strokes/min<br>300次/分                                                |
| Forming part<br>成型机                      | 6-7 groups roller, with Turkish head<br>6-7组成型, 带土耳其头                    |
| Hydraulic pressure for cutting<br>液压切断压力 | 5Mpa                                                                     |
| Machine weight<br>设备重量                   | About 4.8T                                                               |

伸缩缝

Control Joint Bead

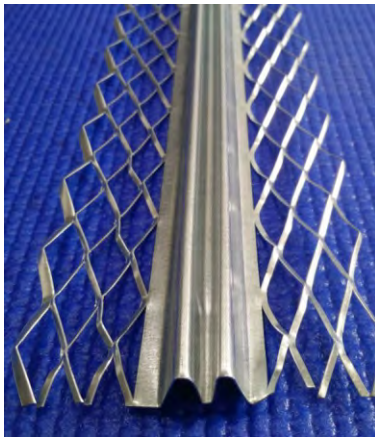

Designed to deal with normal initial stucco shrinkage during hydrating and curing stage of the portland cement stucco (generally exterior or gypsum plaster interior) coats and minor thermal expansion and contraction.  
Materials: Galvanized or stainless steel  
伸缩缝主要作用是防止房屋因气候变化而产生裂缝。  
材料：不锈钢板或者镀锌板

| Model<br>型号 | Width<br>宽度<br>(mm) | Length<br>长度<br>(mm) | Plaster depth<br>抹灰厚度(mm) |
|-------------|---------------------|----------------------|---------------------------|
| CJB13       | 100                 | 2400-3000            | 13                        |
| CJB21       |                     |                      | 21                        |

备注：所有尺寸均可根据客户要求定制。  
Notice: All dimensions can be customized according to your requirements.


带胶条伸缩缝 / Movement Bead

Movement beads joint two plaster beads using PVC would allow movement between surfaces resulting from different expansion, gaps or opening.  
伸缩缝是两种停止抹灰网用PVC条连接起来的方便活动的抹灰配件。



| Model<br>型号 | Width<br>宽度<br>(mm) | Length<br>长度<br>(mm) | Plaster depth<br>抹灰厚度(mm) |
|-------------|---------------------|----------------------|---------------------------|
| AB-MB10     | 140                 | 2400-3000            | 10                        |
| AB-MB13     |                     |                      | 13                        |
| AB-MB16     |                     |                      | 16                        |
| AB-MB19     |                     |                      | 19                        |

备注：所有尺寸均可根据客户要求定制。  
Notice: All dimensions can be customized according to your requirements.

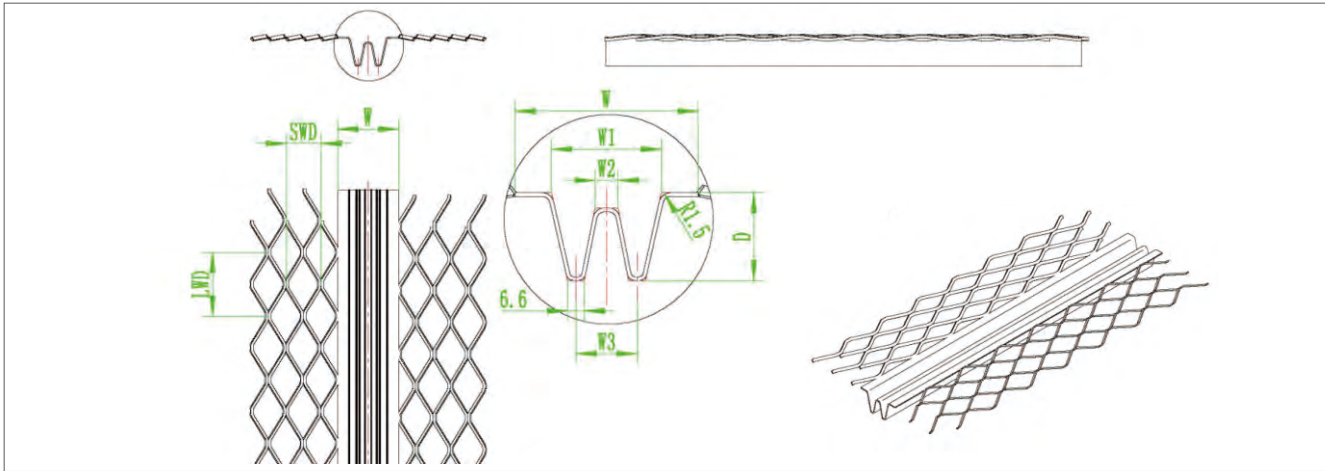


# 钢板网分条生产线

## Expanded Mesh Slitting Production Line



本生产线首先利用开卷机将镀锌钢板或不锈钢薄板卷料主动放出，卷料通过冲网总机上的送料机构进入冲网环节，冲网机通过电机皮带传动将动力传递给曲轴，进而带动模具作上下高速冲剪运动，将薄钢板冲剪成型，进而由后级整平分条机拉伸成所要求的产品尺寸。最后自动收卷机开始收卷成型的产品。

The expanded mesh slitting line production line firstly use the de-coiler to initiative release galvanized steel plate or stainless steel sheet coil, coil cross the expanded main mesh machine feeding mechanism into the expanding link, expanded mesh machine cross the motor belt drive to send the power to the crankshaft, then drive the mold to do the up and down high speed shearing movement, expanded the sheet steel, then the next levelling and slitting machine expanded the required product size. Finally, automatic re-coiler start recoil the mesh.

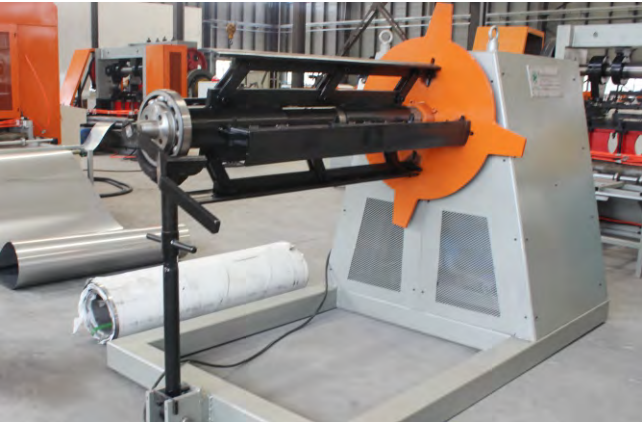

**开卷机**  
承重吨位：≤5T  
卷筒涨缩范围：φ420~510mm  
开卷宽度：≤1250mm  
卷筒主轴中心高：1060mm  
开卷速度：2r/min  
张紧形式：手动（旋转）  
电机：1.5Kw，1420RPM，减速  
机速比1225  
设备工作电压：三相，  
AC380V/50Hz  
外形尺寸（长\*宽\*高）：  
1270\*2270\*1535mm  
重量：890kg

**Decoiler**  
Loading weight:≤5T  
Inner diameter:φ420~  
510mm  
Decoil width:≤1250mm  
Centerline height:1060mm  
Decoiling speed:2r/min  
Tension formMotor:1.5Kw,  
1420RPM, reducer ratio:  
1225  
Voltage:3 phase,  
AC380V/50Hz  
Size:1270\*2270\*1535mm  
Weight:890kg



**冲网机**  
公称压力：250KN  
冲剪板料厚度：≤1.50mm冷态钢板  
冲剪板料宽度：≤1250mm  
滑块行程次数：≤500次/min  
滑块行程：22mm  
压料力：1.5×4KN  
连杆调节距离：10mm  
纵向送料距离：0~5mm  
横向摆动距离：0~20mm  
电机：Y2-160M-  
11/4，11kw，1460RPM  
伺服送料电机：2.0kw/2000  
rpm，速比10  
工作电压：三相，AC380V/50Hz  
外形尺寸（长\*宽\*高）：2120\*237  
0\*2200mm  
重量：4150kg

**Punching Machine**  
Punching force(Nominal pressure):  
250KN  
Material thickness: ≤1.50mm cold steel  
Width: ≤1250mm  
Punching speed: ≤500 strokes/min  
Slider trolley: 22mm  
Pressing force: 1.5×4KN  
Feeding distance: 10mm  
Line feeding distance: 0~5mm  
Mold driven distance: 0~20mm  
Motor: Y2-160M-11/4, 11kw, 1460RPM  
Feeding motor: 2.0kw/2000 rpm, speed  
ratio i10  
Voltage: 3 phase, AC380V/50Hz  
Size: 2120\*2370\*2200mm  
Weight: 4150kg




**整平、分条切断一体机**  
电机功率：2.2kW  
驱动型：链式


**Leveling,slitting and  
cuttingmachine**  
Motor power:2.2Kw  
Driven type:chain type



**涨紧装置**  
承重吨位：100Kg  
收卷宽度：≤1250mm  
卷筒主轴中心高：530~1115mm  
收卷速度：（3~5）m/min，随收卷机速度  
设备工作电压：直流DC24V,传感器电压  
尺寸：L1050×W1550×H1115mm  
重量：150kg

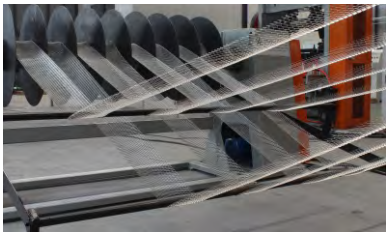

**Tension device**  
Loading weight:100Kg  
Recoiling width: ≤1250mm  
Center: 530~1115mm  
Height of main roller:  
Recoiling speed: 3-5m/min, match with the  
recoiler speed  
Voltage: DC24VV/Hz, Sensor voltage  
Size: L1050×W1550×H1115mm  
Weight: 150Kg

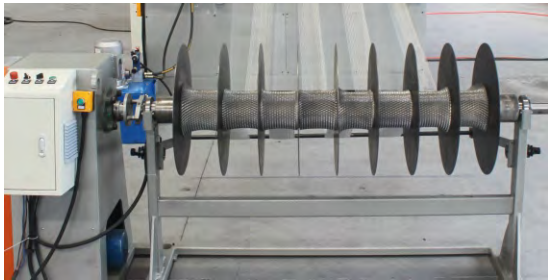


**收卷机**  
承重：200Kg  
适用卷筒内径：φ120mm  
收卷宽度：≤1250mm  
卷筒主轴中心高：≤1250mm  
收卷速度：802mm  
主传动电机：3m/min,卷料轴12r/min  
设备：0.55Kw,1440RPM,减速机速比i=120.63  
工作电压：三相，AC380V/50Hz  
外形尺寸：L460×W2360×H1080mm  
重量：285Kg



**Tension device**  
Loading weight:100Kg  
Recoiling width: ≤1250mm  
Center: 530~1115mm  
Height of main roller:  
Recoiling speed: 3-5m/min, match with the recoiler speed  
Voltage: DC24VV/Hz, Sensor voltage  
Size: L1050×W1550×H1115mm  
Weight: 150Kg

# 钢板网条网

## Coil Mesh

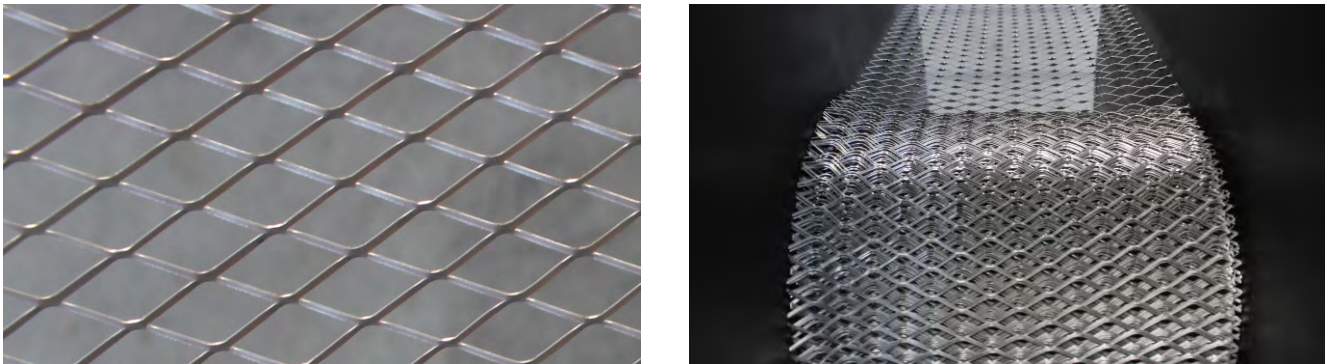


The expanded metal mesh can be used for lots of places.such as filter, facade, decoration mesh or other school supplies.the expanded metal mesh after slitting is used for floor reinforcement and brick.

钢板网的应用广泛，可应用在过滤器，幕墙网，装饰网以及学习用品上。本款钢板网主要应用在地板补砌和砖带。

### Parameter of expanded metal mesh \ 条网的技术参数

| Width 宽度 | Slitting strips 分条数量 | Thickness 厚度 |
|----------|----------------------|--------------|
| 150mm    | 8 strips             | ≤2mm         |
| 200mm    | 6 strips             |              |

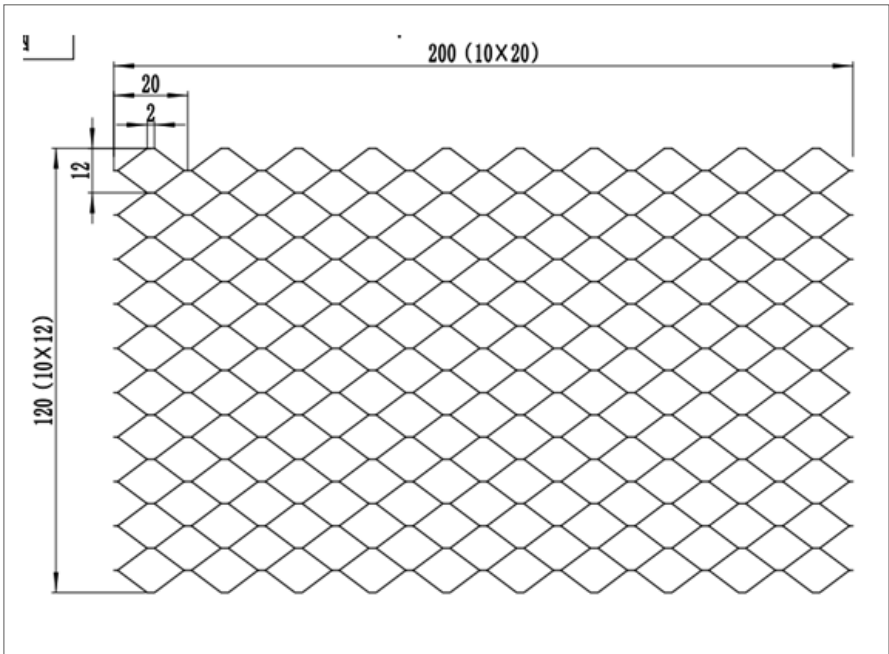

备注：所有尺寸均可根据客户要求定制。  
Notice: All dimensions can be customized according to your requirements.


# 桥架生产线

## Lintel Roll Forming Machine



Steel channel lintel is a structural horizontal block that spans the space or opening between two vertical supports. It can be a decorative architectural element, or a combined ornamented structural item. It is often found over portals,doors, windows and fireplaces. All lintels are produced by Galvanized steel or Stainless steel,it make the construction system more and more strong.

桥架是跨越两个垂直支撑件之间的空间或开口的结构水平块。它可以用来装饰建筑元素，或结合装饰结构项目，被称为梁和砌块梁或肋板和砌块板中的肋骨，经常被应用在门户、门、窗和壁炉等地方。使得建筑体系更加坚固。

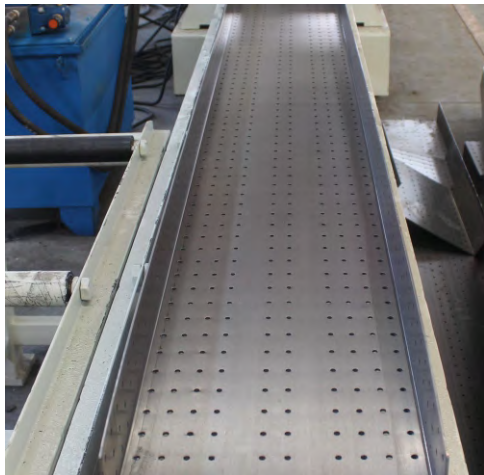



**送料整平二合一**  
材料宽度: ≤456 mm ;  
厚度: ≤3.2mm ;  
卷料内径: 450-530mm  
最大承重: 2T  
整平机辊数: 7 辊

**Decoiler with straightener**  
Width: ≤456mm  
Thickness:≤3.2mm  
Inner diameter: 450-530mm  
Max loading weight:2T  
Rollers of straightener: 7 rollers



**冲床**  
宽度: ≤456 mm  
厚度: ≤3.2mm  
材料: 低碳钢  
冲力: 125T  
功率: 15KW

**Punching machine**  
Width:≤456mm  
Thickness:≤3.2mm  
Material:Mild steel  
Punching force:125T  
Power:15KW




**成型机+液压切断**  
成型辊数量: 11 组  
传动: 齿轮传动  
成型辊直径: φ75mm  
速度: 8m/分钟  
成型辊材料: Gcr15,  
硬度: HRC58-62°  
主要电机: 11kw, 变频器控制  
液压切断  
方式: 液压切断,可根据设定长度切断  
油泵: 7.5KW

**Forming machine and Hydraulic cutting**  
Roller number: 11 sets  
Drive type:Gear drive  
Diameter of forming rollers:φ75mm  
Speed: 10-20 m/min  
Material of forming rollers:Gcr15  
Hardness :HRC58-62°  
Main motor:11Kw.control by frequency converter  
Hydraulic cutting  
Cutting type:hydraulic cutting  
Pump:7.5Kw  
Cutting according to the setting length



收料台 Collecting

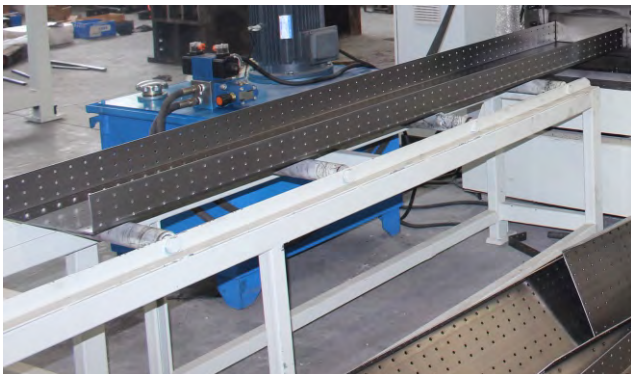

# Selection Guidance for building mesh machine 墙体网机生产线询盘需求表

Important customer Details 重要客户信息

|             |  |                     |  |
|-------------|--|---------------------|--|
| Name 名字 *   |  | Country 国家 *        |  |
| E-mail 邮箱 * |  | Power supply 电力要求 * |  |

Project 项目性质

|                                                                          |                                                                          |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <input type="checkbox"/> First purchase of expanded metal mesh line 新建项目 | <input type="checkbox"/> Expanding plan on expanded metal mesh line 扩展项目 |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------|

Finished product requirement 要求

|                       |                                                                                                                                                                                                       |                                                |                                                  |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------|
| Finished product 生产产品 | <input type="checkbox"/> Rib lath 模板网                                                                                                                                                                 | <input type="checkbox"/> Hi-rib lath 快易收口网     | <input type="checkbox"/> Brickwork mesh 砖带网      |
|                       | <input type="checkbox"/> Angle bead护角                                                                                                                                                                 | <input type="checkbox"/> Stucco lath批汤网        | <input type="checkbox"/> Plaster stop bead 停止抹灰网 |
|                       | <input type="checkbox"/> Movement bead伸缩缝                                                                                                                                                             | <input type="checkbox"/> Control joint bead伸缩缝 | <input type="checkbox"/> Architrave bead门楣网      |
| Mesh size 产品规格        | Mesh opening size 网孔尺寸 : _____ mm*      Strand width梗宽: _____ mm                                                                                                                                      |                                                |                                                  |
| Material 材质           | <input type="checkbox"/> Low carbon Galvanized Steel 镀锌板 <input type="checkbox"/> Aluminum 铝 <input type="checkbox"/> Stainless steel 不锈钢<br>Other Steel 其他材质: _____<br>Max. thickness 最大厚度: _____ mm |                                                |                                                  |

Machine requirements 机器要求

|                         |                                                                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Speed 速度                | <input type="checkbox"/> High speed 高速 <input type="checkbox"/> Low speed 低速                                                                                |
| Feeding type 送料方式       | <input type="checkbox"/> Mechanical type机械送料 <input type="checkbox"/> Servo feeding device伺服送料                                                              |
| Controlling system 控制系统 | Electrical control电控方式: <input type="checkbox"/> Normal type 普通控制柜 <input type="checkbox"/> PLC                                                             |
|                         | Other control其他控制: <input type="checkbox"/> Length calculate 计长 <input type="checkbox"/> pieces calculate 计数                                                |
| Mould material 模具材质     | <input type="checkbox"/> Die steel 模具钢 <input type="checkbox"/> High-speed steel 高速钢 <input type="checkbox"/> Alloy steel 合金钢 <input type="checkbox"/> TC53 |

Accessory machines 辅助设备

|                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> Decoiler 开料架 <input type="checkbox"/> pneumatic cutting 气动切断 <input type="checkbox"/> Hydraulic cutting 液压切断 <input type="checkbox"/> Collection table 收料台<br><input type="checkbox"/> Straightening and slitting machine (rotary expanding machine only)整平分条一体机(辊切拉伸机专用) <input type="checkbox"/> Recoiler 收卷机 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

(Please note that accommodation expense for our technicians who sent to aboard to test the machine will be paid by buyer. )  
备注：如需安装调试，往返食宿费用由客户支付。

Signed by the customer 客户签名:  
Signed by the seller    卖方签名:

# 我们的展会 Our exhibition

2018迪拜展会  
2018 Dubai Big5 exhibition



2017迪拜展会  
2017 Dubai Big5 exhibition



2016迪拜展会  
2016 Dubai Big5 exhibition



2015迪拜展会  
2015 Dubai Big5 exhibition



委内瑞拉展会  
Venezuela exhibition



广交会 / Canton fair




2016 德国杜塞尔多夫线材管材展  
2016 Germany Dusseldorf Wire & Tube exhibition



2018 德国展会  
2018 German exhibition



2015美国拉斯维加斯建材展 / 2015 Las Vegas building materials exhibition

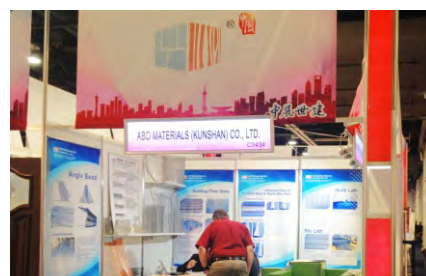

网址/Web : [www.anbermachine.com](http://www.anbermachine.com)

业务电话/Tel : 0510-88239309/0510-88239310

微信/Wechat : 13376248186/18626338299

做机械，我们是认真的。  
We are serious in manufacture the machine.